



Product Parameters

| | |
|-----------------------|---|
| Product Name | Frameless Glass Automatic Door |
| Introduction | Material: Aluminum Alloy+Glass+Automatic system+Accssories |
| Glass Oplions | Standard specifications: 8mm Clear tempered glass |
| | Optional specifications: Double insulating glass, triple glass, laminated explosion-proof glass , bulletproof glass |
| | Material: All glass is tempered glass |
| | Certificate: US IGCC(R)/IGMA(R); US SGCC; CHN CCC; AU SAI |
| | Customized color: frosted,bluc, graygreen, brown, Etc |
| Prolile Options | Optional glass: Low-E glass, Art glass, Coated glass, Etc |
| | Profile Brand: Chinese top brand |
| | Profile Thickness: 2.0mm |
| | Surface treatment process: Powder coating, Anodizing, PVDF coating, Etc. |
| Electric System | Profile Color: Customized |
| | Motor brand: Japan Panasonic/China Top Brand |
| | Traction weight: Maximum 300KG/Panel |
| | Opening and closing speed: 200-600mm/sec, Adjustable |
| Access Control System | Standard functions: Induction probe, Electric lock, Laser anti-pinch function |
| | Smart lock: ID card, password, fingerprint, face recognition, etc. (optional function) |
| Other Accessories | Hardware:China's top brand |
| | Scaling Strip: EPDM Scaling Strip |
| | Track: NO or Stainless steel rail |
| | Scaling Strip:EPDM Scaling Strip |

Common Configuration



One fixed One mobile




Two fixed Two mobile

About Motor




65W Brushless Motor
Max Capacity 150kg
Speed 2800RPM/min

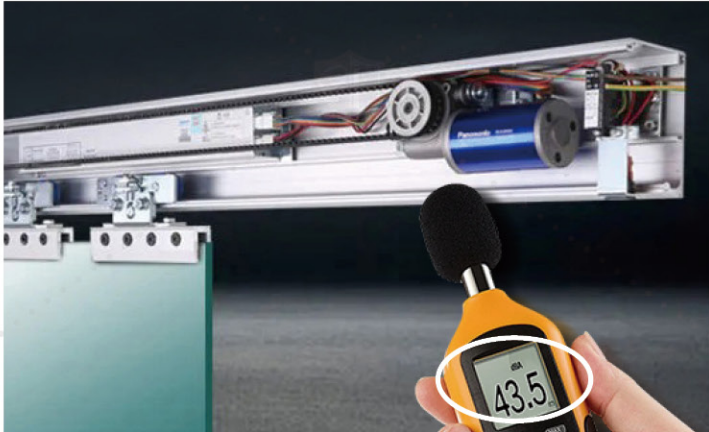


Low Noise
Less than 45dBA
Test door weight 100kg;
The sound of the motor starting up.

55/80 Series Automatic Door - CAD Drawing

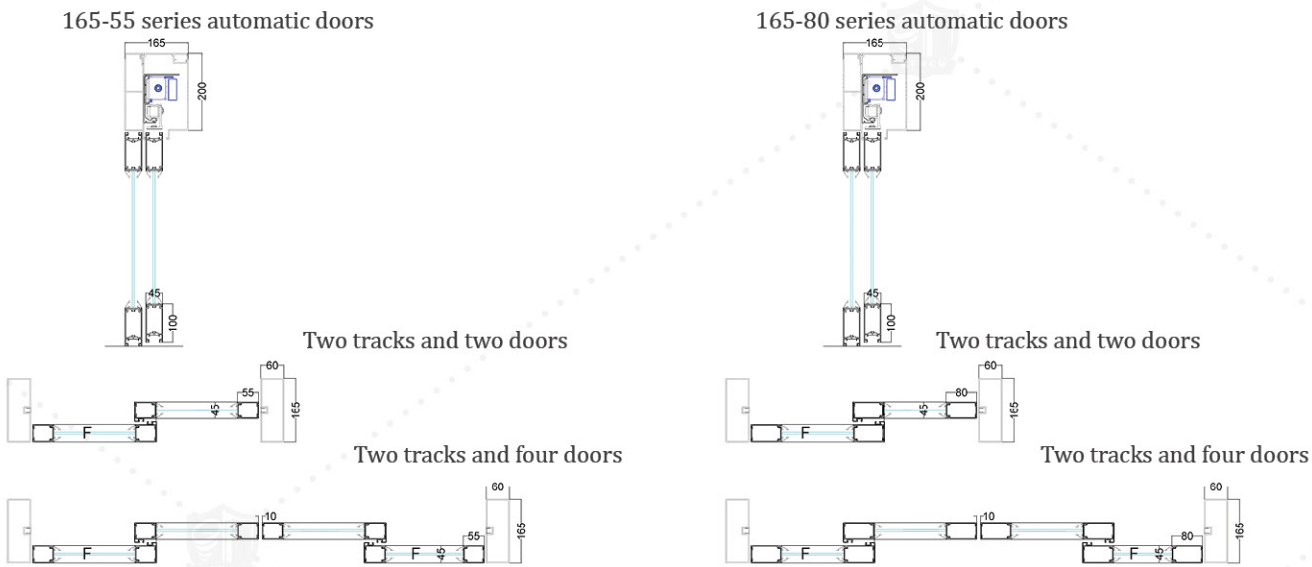

Main Aluminum Profiles Display

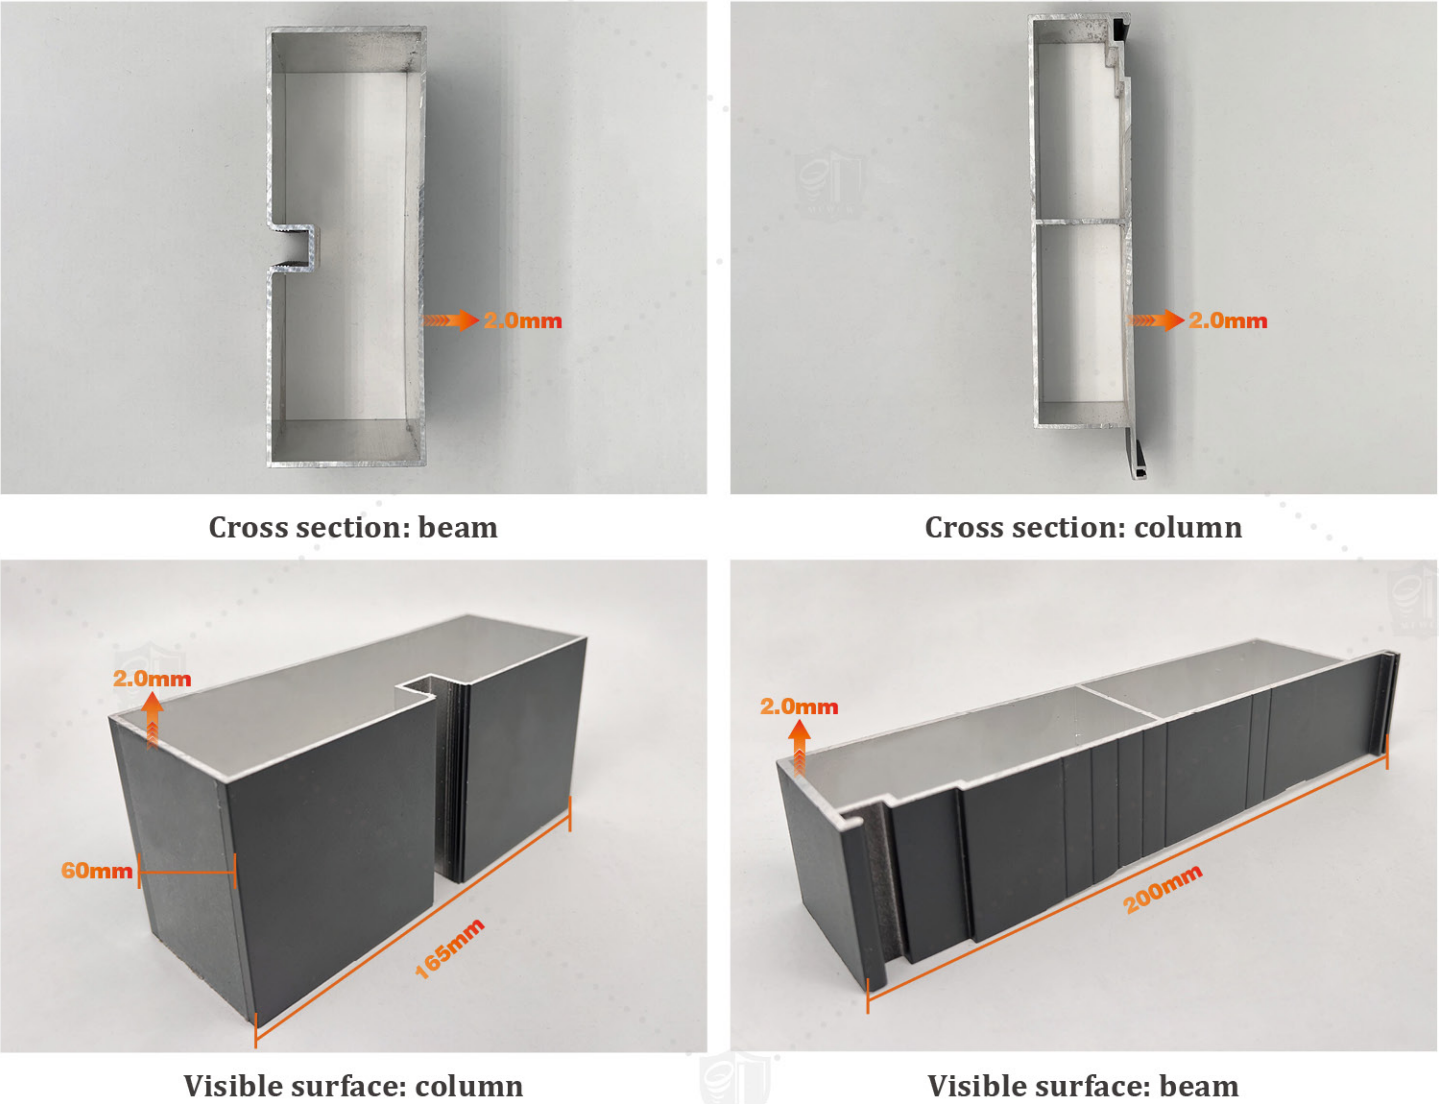


Standard Color Configuration



Other colors can be customized upon request, RAL color number is required

Glass Type

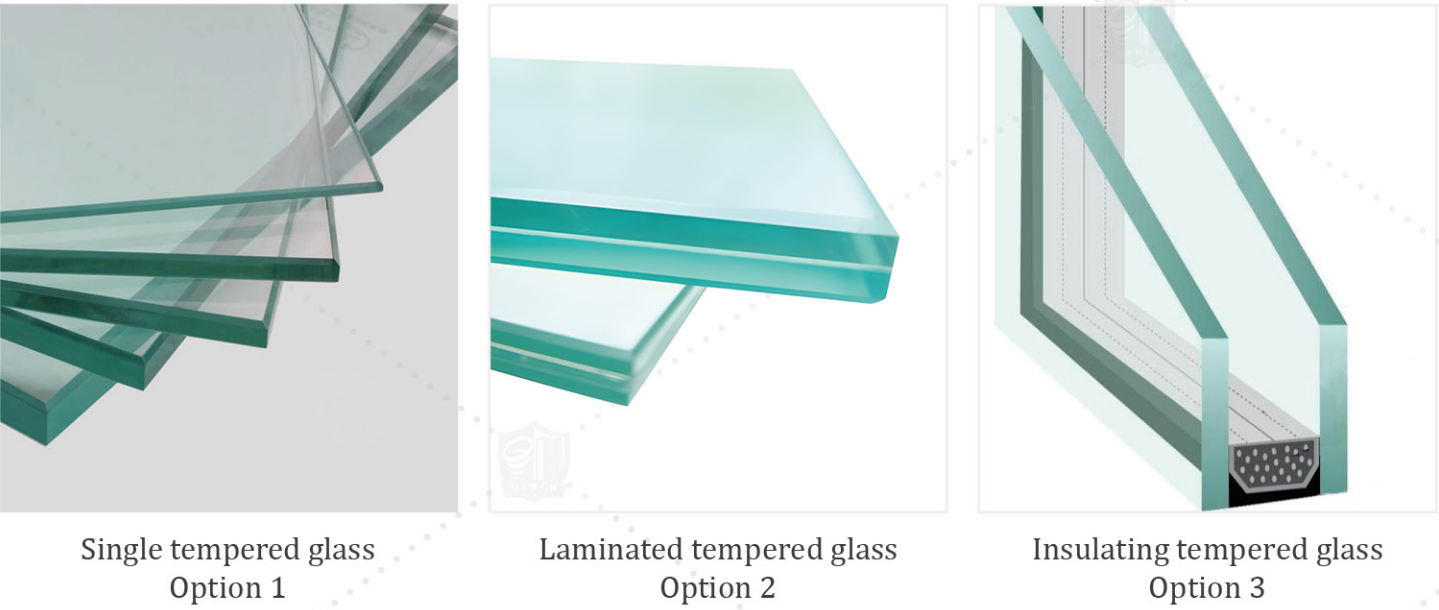

Hardware Accessories



Hardware colors include black and silver

Frameless Automatic Door Case Display





Product Parameters

| | |
|-----------------------|---|
| Product Name | 16 Series Ultra Slim Aluminum Glass Automatic Door |
| Introduction | Material: Aluminum Alloy+Glass+Automatic system+Accessories |
| Glass Options | Standard specifications: 8mm Clear tempered glass |
| | Optional specifications: Double insulating glass, triple glass, laminated explosion-proof glass , bulletproof glass |
| | Material: All glass is tempered glass |
| | Certificate: US IGCC(R)/IGMA(R); US SGCC; CHN CCC; AU SAI |
| | Customized color: frosted,blue, graygreen, brown, Etc |
| Profile Options | Optional glass: Low-E glass, Art glass, Coated glass, Etc |
| | Profile Brand: Chinese top brand |
| | Profile Thickness: 2.0mm |
| | Visible Width Of Profile: 16mm |
| | Door Frame Total Thickness: 115mm |
| Electric System | Surface treatment process: Powder coating, Anodizing, PVDF coating, Etc. |
| | Profile Color: Customized |
| | Motor brand: Japan Panasonic/China Top Brand/Hyundai |
| | Traction weight: Maximum 300KG/Panel |
| Access Control System | Opening and closing speed: 200-600mm/sec, Adjustable |
| | Standard functions: Induction probe, Electric lock, Laser anti-pinch function |
| Other Accessories | Smart lock: ID card, password, fingerprint, face recognition, etc. (optional function) |
| | Hardware:China's top brand |
| | Scaling Strip: EPDM Scaling Strip |
| | Track: NO or Stainless steel rail |
| | Scaling Strip:EPDM Scaling Strip |

Common Configuration



One fixed One mobile



Two fixed Two mobile

About Motor



100W permanent magnet synchronous motor
Maximum load 150kg
Speed 200mm/s-400mm/s



Magnetic suspension sliding door buffer
Super strong impact resistance, more balanced buffering

Ultra Slim Glass Automatic Door Display





Product Parameters

| | |
|-----------------------|---|
| Product Name | 55 Series Aluminum Glass Automatic Door |
| Introduction | Material: Aluminum Alloy+Glass+Automatic system+Accessories |
| Glass Options | Standard specifications: 8mm Clear tempered glass |
| | Optional specifications: Double insulating glass, triple glass, laminated explosion-proof glass , bulletproof glass |
| | Material: All glass is tempered glass |
| | Certificate: US IGCC(R)/IGMA(R); US SGCC; CHN CCC; AU SAI |
| | Customized color: frosted,blue, graygreen, brown, Etc |
| Profile Options | Optional glass: Low-E glass, Art glass, Coated glass, Etc |
| | Profile Brand: Chinese top brand |
| | Profile Thickness: 2.0mm |
| | Visible Width Of Profile: 55mm |
| | Door Frame Total Thickness: 165mm |
| Electric System | Surface treatment process: Powder coating, Anodizing, PVDF coating, Etc. |
| | Profile Color: Customized |
| | Motor brand: Japan Panasonic/China Top Brand |
| | Traction weight: Maximum 300KG/Panel |
| Access Control System | Opening and closing speed: 200-600mm/sec, Adjustable |
| | Standard functions: Induction probe, Electric lock, Laser anti-pinch function |
| Other Accessories | Smart lock: ID card, password, fingerprint, face recognition, etc. (optional function) |
| | Hardware:China's top brand |
| | Scaling Strip: EPDM Scaling Strip |
| | Track: NO or Stainless steel rail |
| | Scaling Strip:EPDM Scaling Strip |

Common Configuration



One fixed One mobile



Two fixed Two mobile

About Motor



65W Brushless Motor
Max Capacity 150kg
Speed 2800RPM/min



Low Noise
Less than 45dBA
Test door weight 100kg;
The sound of the motor starting up.

Framed Automatic Door Case Display





Product Parameters

| | |
|-----------------------|---|
| Product Name | 80 Series Aluminum Glass Automatic Door |
| Introduction | Material: Aluminum Alloy+Glass+Automatic system+Accessories |
| Glass Options | Standard specifications: 8mm Clear tempered glass |
| | Optional specifications: Double insulating glass, triple glass, laminated explosion-proof glass , bulletproof glass |
| | Material: All glass is tempered glass |
| | Certificate: US IGCC(R)/IGMA(R); US SGCC; CHN CCC; AU SAI |
| | Customized color: frosted,blue, graygreen, brown, Etc |
| Profile Options | Optional glass: Low-E glass, Art glass, Coated glass, Etc |
| | Profile Brand: Chinese top brand |
| | Profile Thickness: 2.0mm |
| | Visible Width Of Profile: 80mm |
| | Door Frame Total Thickness: 165mm |
| Electric System | Surface treatment process: Powder coating, Anodizing, PVDF coating, Etc. |
| | Profile Color: Customized |
| | Motor brand: Japan Panasonic/China Top Brand |
| | Traction weight: Maximum 300KG/Panel |
| Access Control System | Opening and closing speed: 200-600mm/sec, Adjustable |
| | Standard functions: Induction probe, Electric lock, Laser anti-pinch function |
| Other Accessories | Smart lock: ID card, password, fingerprint, face recognition, etc. (optional function) |
| | Hardware:China's top brand |
| | Scaling Strip: EPDM Scaling Strip |
| | Track: NO or Stainless steel rail |
| | Scaling Strip:EPDM Scaling Strip |

Common Configuration



One fixed One mobile



Two fixed Two mobile

About Motor




65W Brushless Motor
Max Capacity 150kg
Speed 2800RPM/min




Low Noise
Less than 45dBA
Test door weight 100kg;
The sound of the motor starting up.


80 Series Automatic Door - CAD Drawing

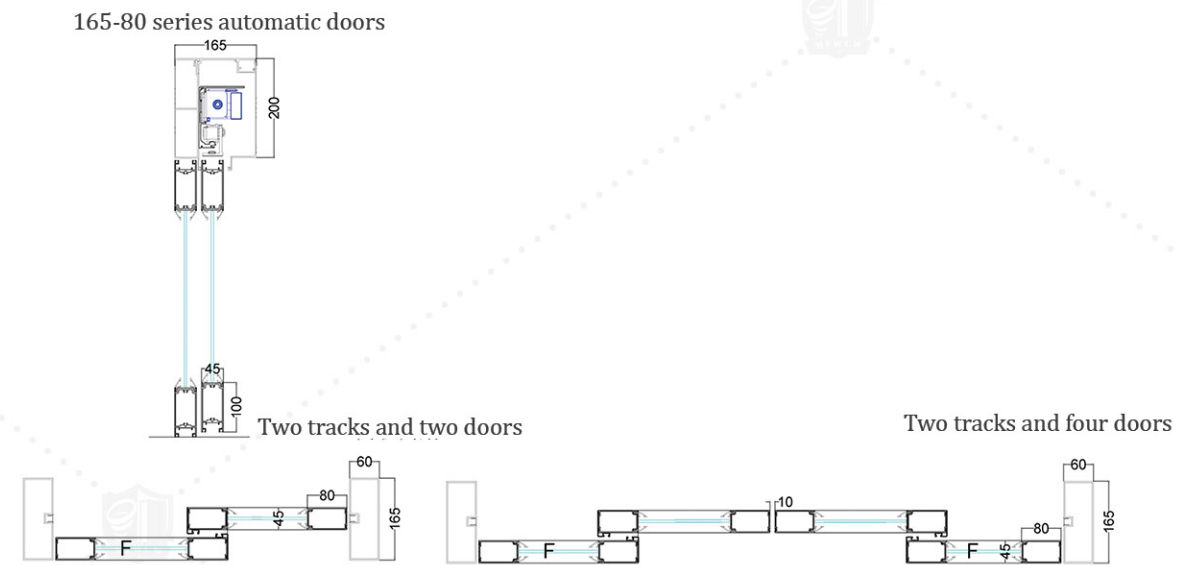


Main Aluminum Profiles Display

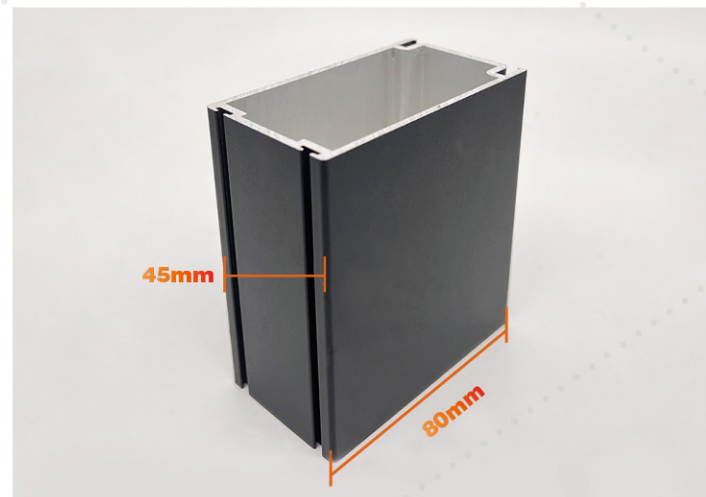


Cross-section: Border

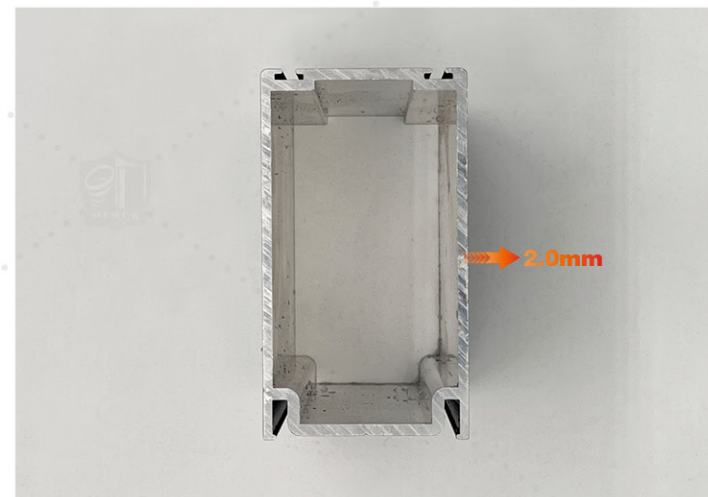

Visible surface: Door panel

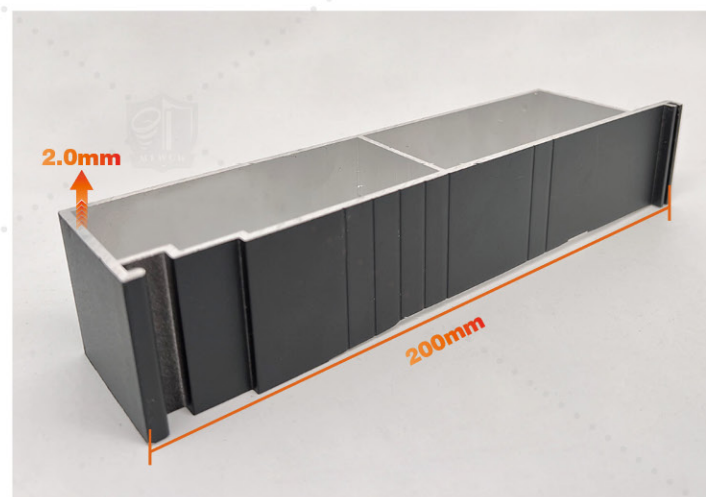

beam

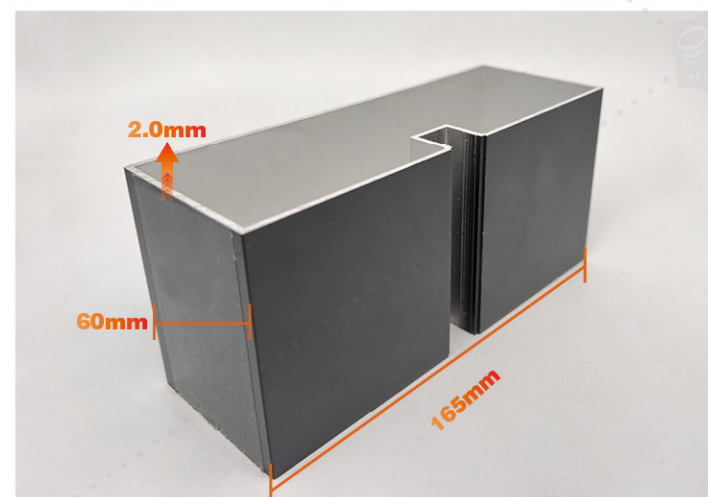

Column

Standard Color Configuration



matte black




sand gray



bright white

Other colors can be customized upon request, RAL color number is required


Glass Type

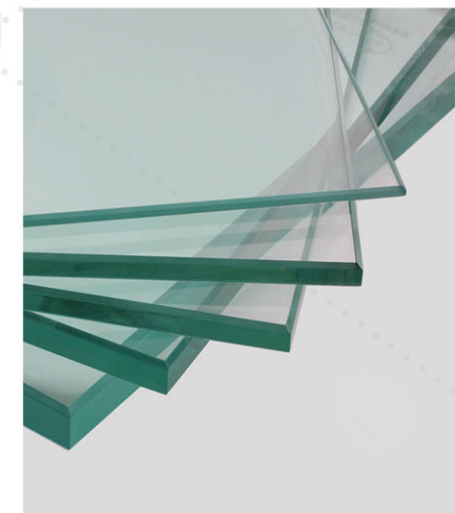

Single tempered glass
Option 1



Laminated tempered glass
Option 2

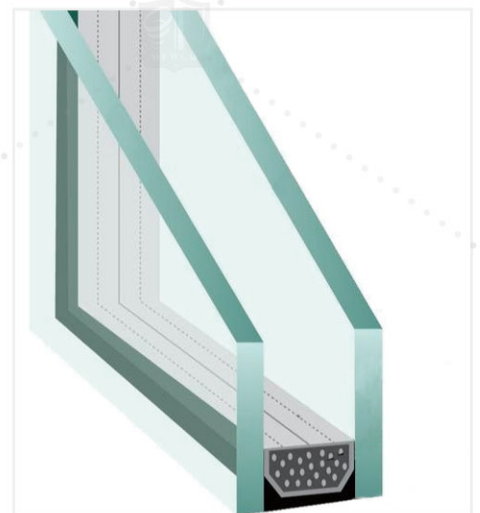

Insulating tempered glass
Option 3


Hardware Accessories



Hardware colors include black and silver

Framed Automatic Door Case Display



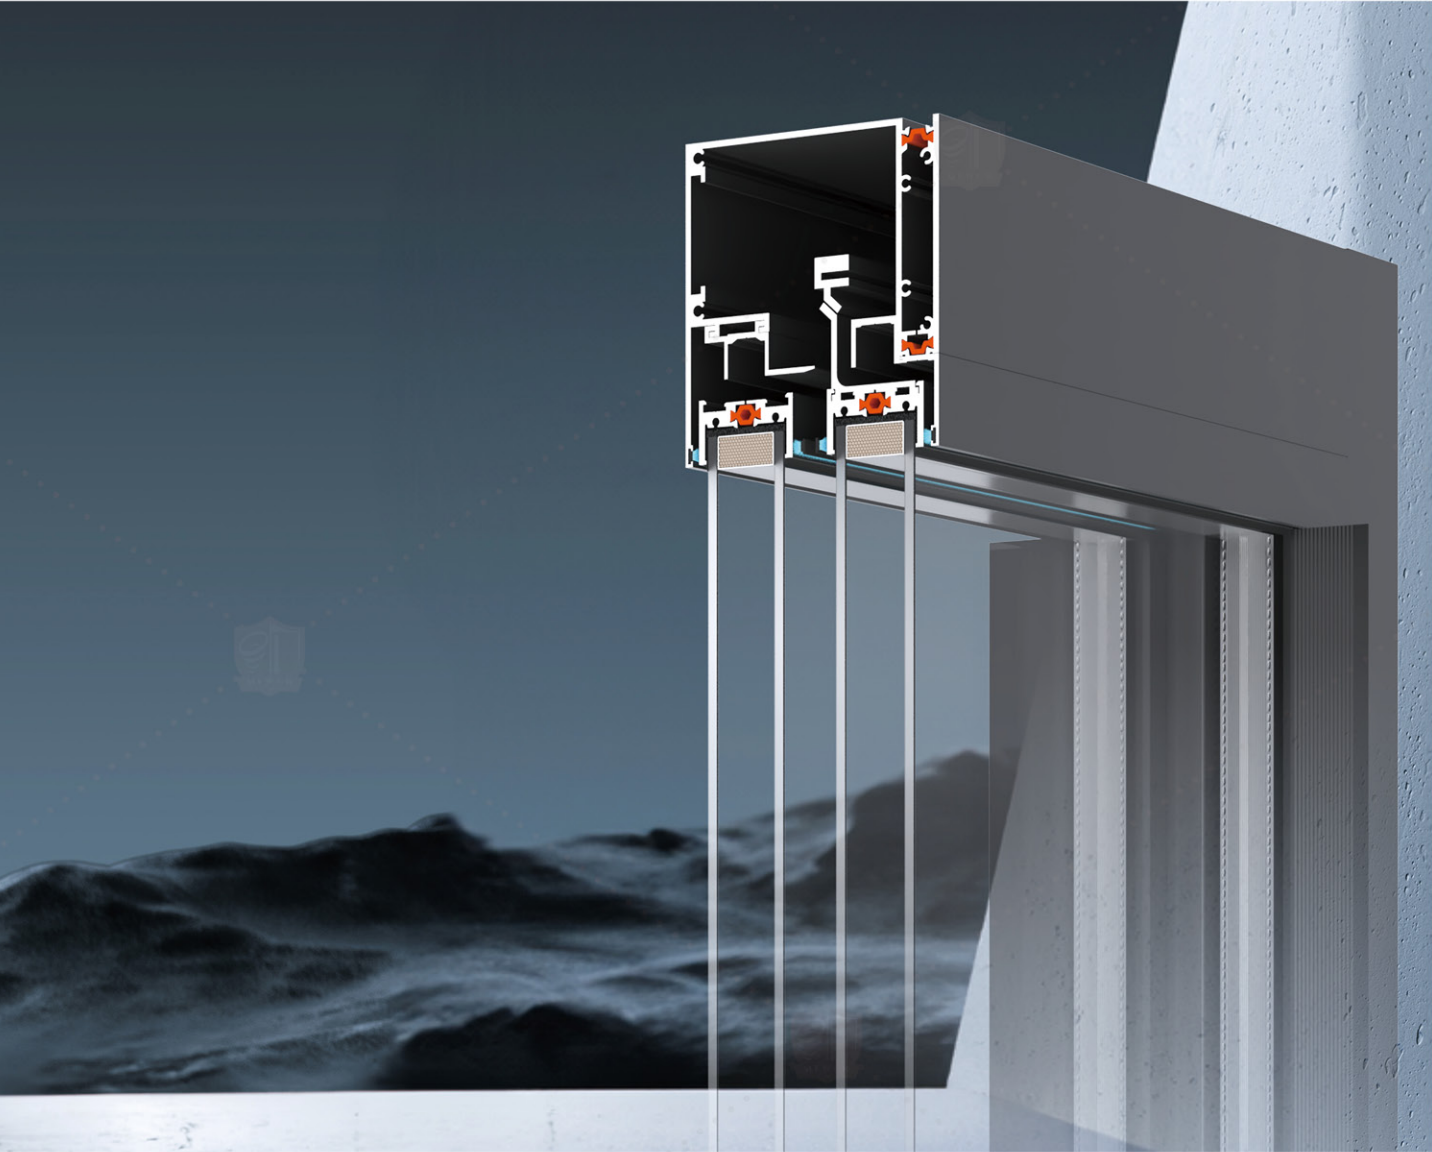

Product Parameters

| | |
|-------------------------------|---|
| Product Name | 120 Series Electric External Ultra-slim Sliding Door/Windows |
| Introduction | Material: Aluminum alloy + glass + automatic system + accessories |
| Glass Options | Standard specifications: 5+5mm transparent double-layer tempered glass |
| | Optional specifications: double-layer insulating glass, triple-layer glass, laminated explosion-proof glass, bullet-proof glass |
| | Material: All glass is tempered glass |
| | Certification: IGCC(R)/IGMA(R) of the United States; SGCC of the United States; CCC of China; SAI of Australia |
| | Customized colors: frosted, blue, gray-green, brown, etc. |
| Profile configuration options | Optional glass: Low-E glass, art glass, coated glass, etc. |
| | Profile brand: China's top brand |
| | Profile thickness: 2.0mm-8.0mm |
| | Surface treatment process: powder spraying, anodizing, PVDF spraying, etc. |
| Electrical System | Profile color: Standard colors: matte black, white, sand gray, other colors can be customized according to RAL color card |
| | Motor brand: Japan Panasonic/China top brand |
| | Traction weight: 2000KG/weight |
| | Opening and closing speed: 200-600mm/sec, adjustable |
| Access Control System | Standard functions: induction probe, electric lock, laser anti-pinch function |
| | Smart lock: ID card, password, fingerprint, face recognition, etc. (optional function) |
| Other accessories | Hardware: Top Chinese Brands |
| | Baffle: EPDM baffle |
| | Track: None or stainless steel track |
| | Screen: None (can be added if necessary) |

Common Configuration





One fixed One mobile



Two fixed Two mobile

120 Series Electric External Ultra-slim Sliding Door/Windows-CAD Drawing

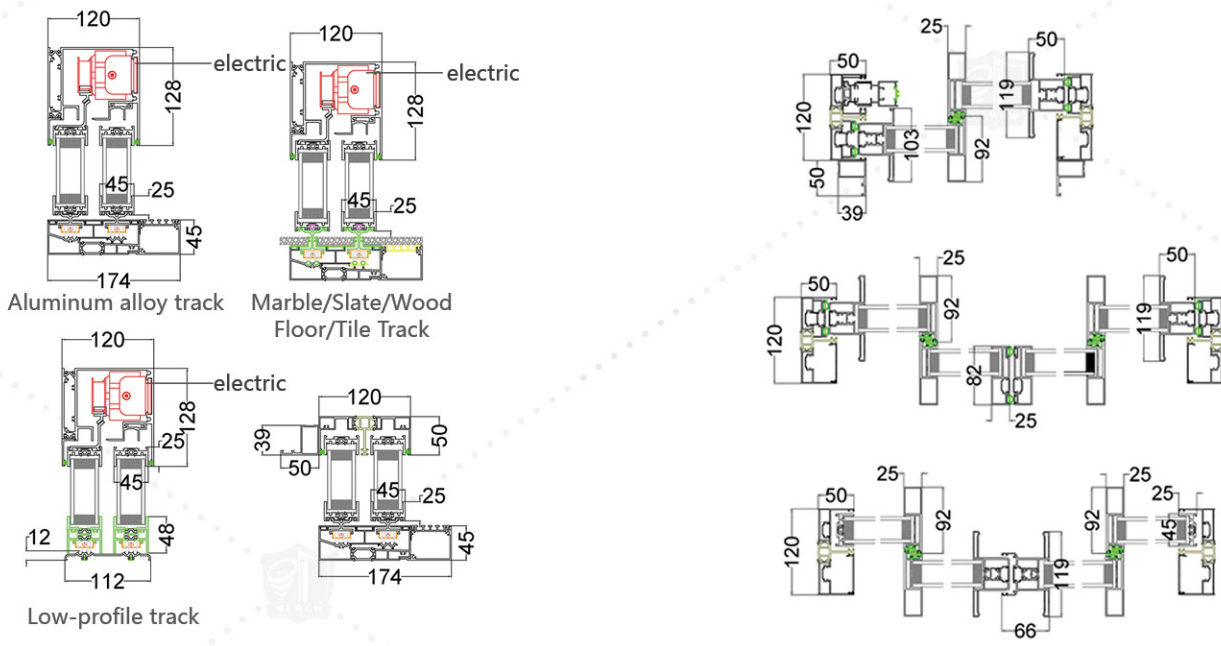

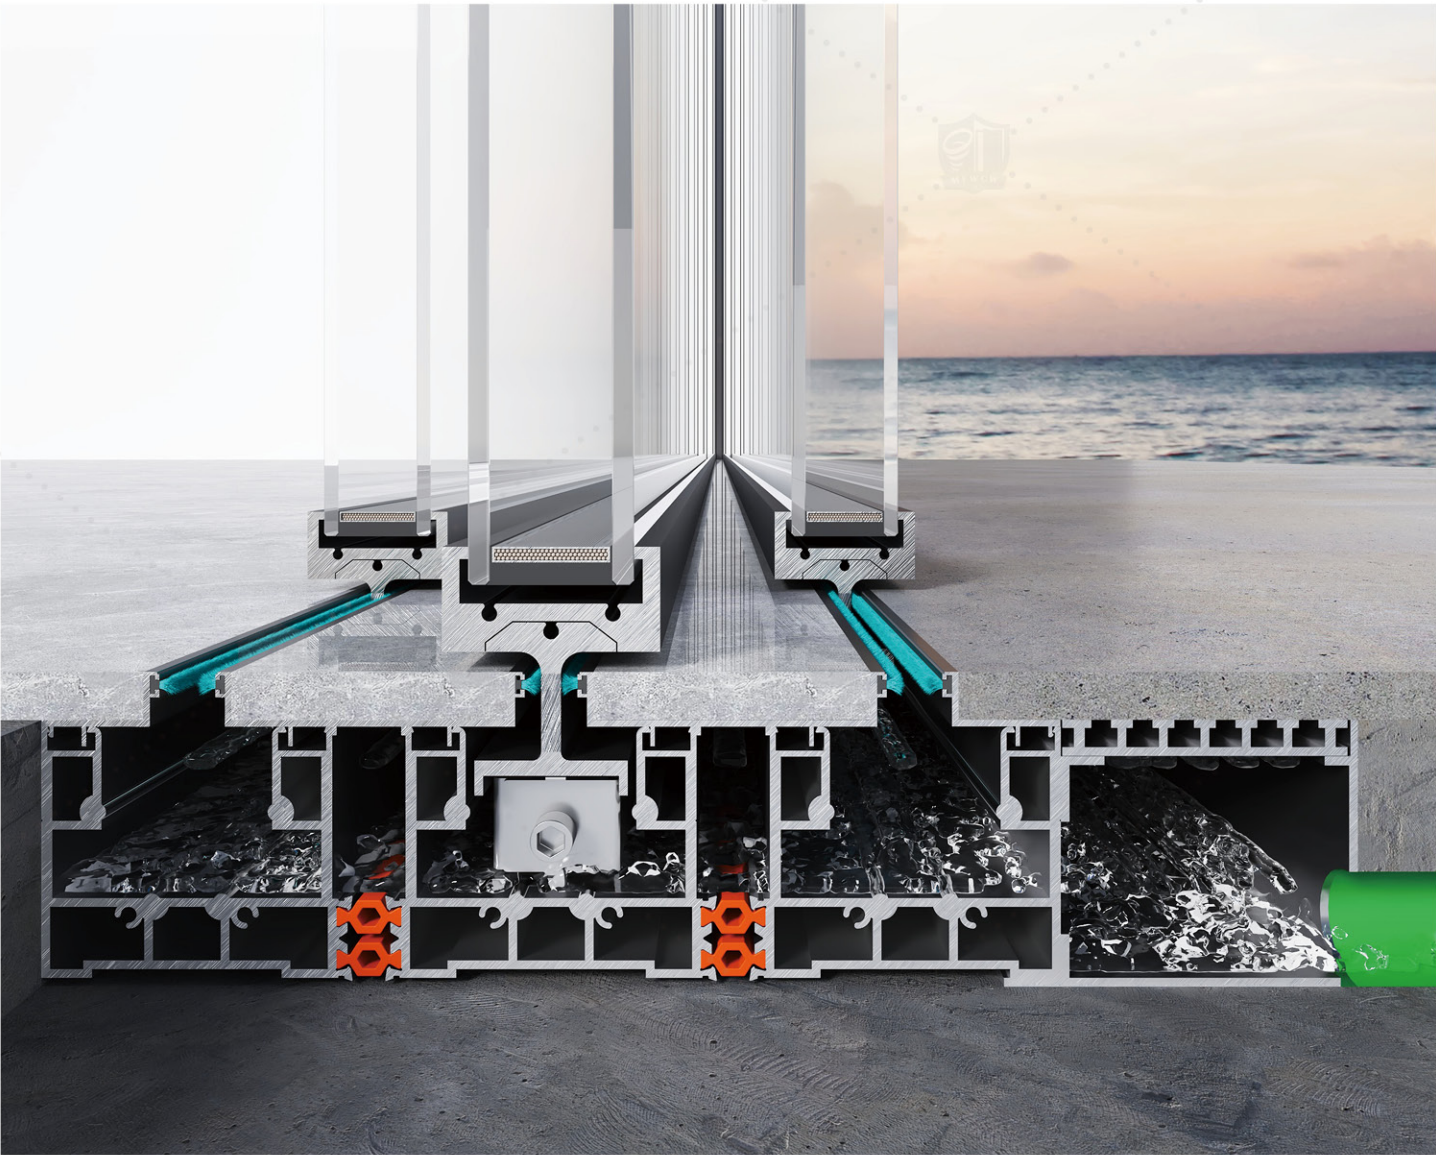

Product Parameters

| | |
|-------------------------------|---|
| Product Name | 150 Series Electric External Ultra-slim Sliding Door/Windows |
| Introduction | Material: Aluminum alloy + glass + automatic system + accessories |
| Glass Options | Standard specifications: 5+5mm transparent double-layer tempered glass |
| | Optional specifications: double-layer insulating glass, triple-layer glass, laminated explosion-proof glass, bullet-proof glass |
| | Material: All glass is tempered glass |
| | Certification: IGCC(R)/IGMA(R) of the United States; SGCC of the United States; CCC of China; SAI of Australia |
| | Customized colors: frosted, blue, gray-green, brown, etc. |
| Profile configuration options | Optional glass: Low-E glass, art glass, coated glass, etc. |
| | Profile brand: China's top brand |
| | Profile thickness: 2.0mm-8.0mm |
| | Surface treatment process: powder spraying, anodizing, PVDF spraying, etc. |
| Electrical System | Profile color: Standard colors: matte black, white, sand gray, other colors can be customized according to RAL color card |
| | Motor brand: Japan Panasonic/China top brand |
| | Traction weight: 2000KG/weight |
| | Opening and closing speed: 200-600mm/sec, adjustable |
| Access Control System | Standard functions: induction probe, electric lock, laser anti-pinch function |
| | Smart lock: ID card, password, fingerprint, face recognition, etc. (optional function) |
| Other accessories | Hardware: Top Chinese Brands |
| | Baffle: EPDM baffle |
| | Track: None or stainless steel track |
| | Screen: None (can be added if necessary) |

Common Configuration



One fixed One mobile



Two fixed Two mobile

About Motor




24V120W brushless motor
Maximum load 500 kg
Speed 3600RPM/4A min




Low noise
less than 45dBA
test door weight 1000kg;
motor start-up sound

150 Series Electric External Ultra-slim Sliding Door/Windows-CAD Drawing

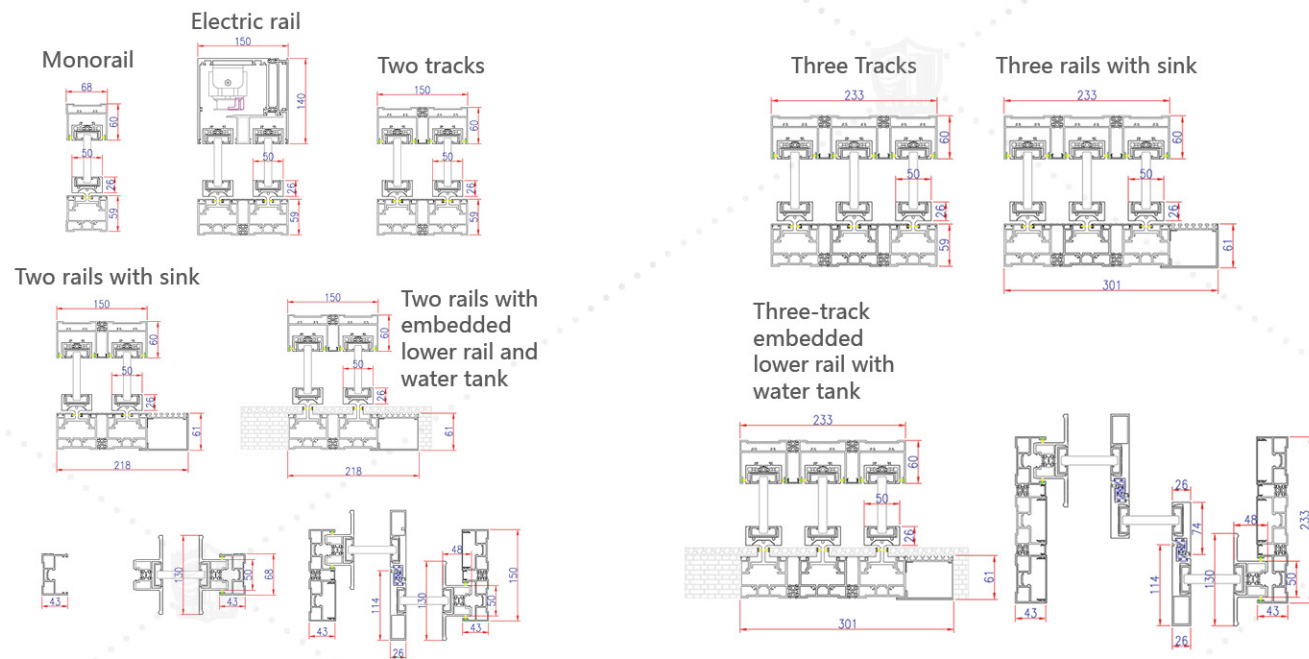

Main Aluminum Profiles Display

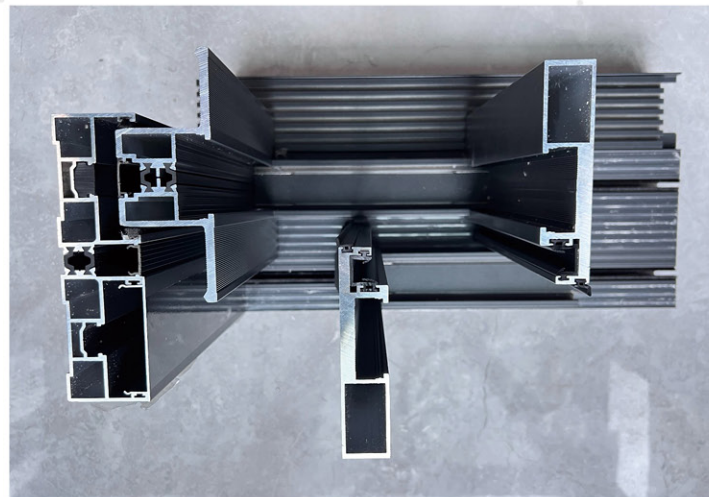


Visible surface: Profile



Cross-section: Profile



Side: Profile

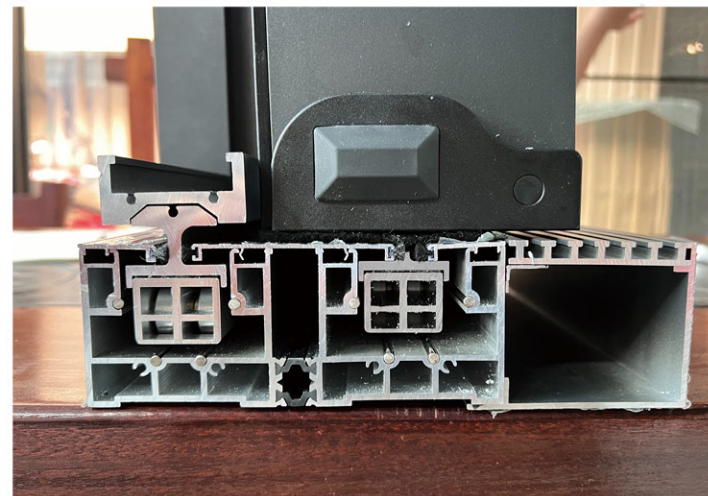

Aluminum alloy track

Standard Color Configuration



matte black




sand gray




bright white

Other colors can be customized upon request, RAL color number is required


Glass Type

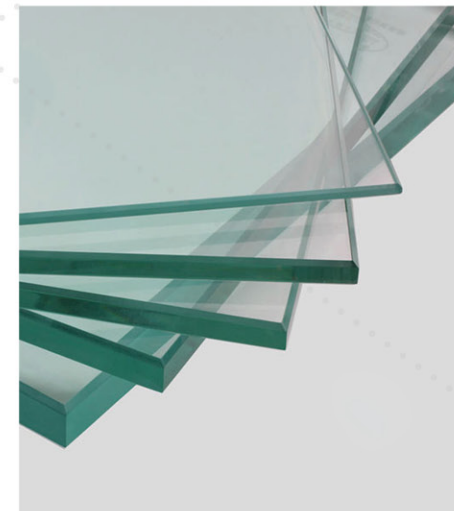

Single tempered glass
Option 1

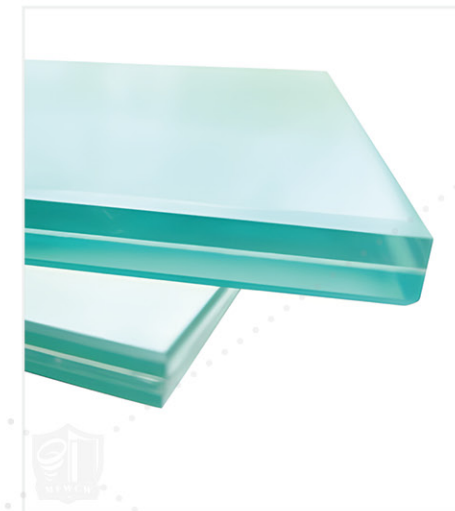

Laminated tempered glass
Option 2

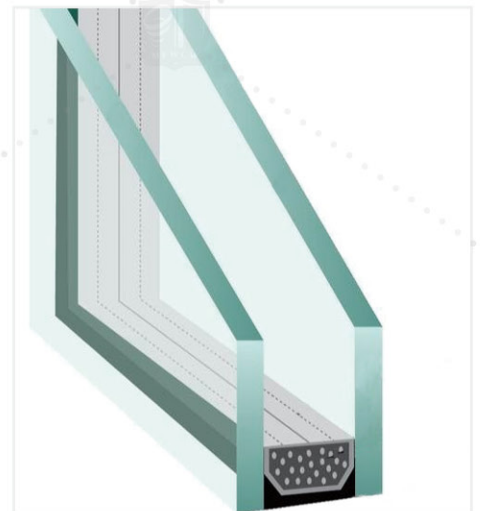

Insulating tempered glass
Option 3

Hardware Accessories



Hardware colors include black and silver



